

DATA SHEET


REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 7,5 mm

Item no.: 20368 | 20369 | 20370 | 20371 | 20372 | 20414




VIDEO



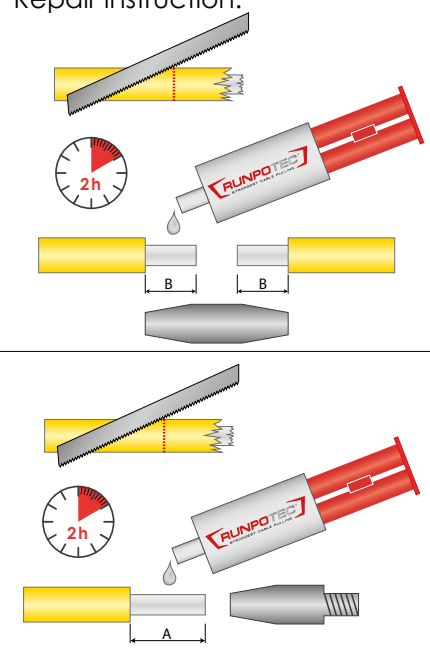
Fibreglass rod 7,5 mm

[Click here Video](#)



[Click here Productinformation](#)

Repair instruction:







Ø mm	A	B
7,5 mm	42 mm	24 mm

DATA						
ITEM NO.	20368	20369	20370	20371	20372	20414
LENGTH	40 m	50 m	60 m	80 m	100 m	120 m
TOTAL WEIGHT KG	2,70	3,40	4,10	5,30	6,70	7,9
DIMENSION	L 700 / B 700 / H 110					
MATERIAL	Fiberglass core with PP sheath					
PIPE Ø	optimal for 50 - 120 mm					
BREAKING LOAD	400 kg					
BENDING RADIUS	500 mm					

- ADVANTAGES**
- ✓ Glass fibre rod total breaking load up to 3400 kg
 - ✓ Total breaking load 400 kg
 - ✓ Bending radius 500 mm

Recommended tube diameter, bending radius and total breaking load Ø 7,5 mm

\varnothing				
7,5 mm	50 - 120 mm	500 mm	3400 kg	400 kg

DESCRIPTION


Replacement glass fibre rod Ø 7.5 mm with stainless steel end sleeve at the beginning and end of the rod - RUNPOTEC RTG Ø 12 mm thread.
Glass fibre rod tensile load 3400 kg, total tensile load 330 kg.

Optimal application area: for pipe diameters 50 mm - 120 mm
Application video: a short, very informative application video can be viewed by scanning the QR code or on www.runpotec.com.
Scope of delivery: 1 piece glass fibre rod Ø 7.5 mm with end sleeves (start/end)

INFORMATION

Suitable fibreglass rods Ø 7,5 mm (Lengths 40 - 120 Meter)

Fibreglass rod Ø 7,5 mm:
10076/10077/10078/10079/
10080/10091



[Click here Productinformation](#)